

# H-Tech LED High Bay Light





- CREE LED source.High luminous efficiency and long life.
- High efficiency LED driver ,the wide input voltage is AC100-277V
- Light efficiency>90LM/W, CRI >75
- Heat pipe with FIN cooling design,better cooling,.LED Tj<85 °C
- The products got the RoHS , UL&CUL ,FCC,DLC certification
- Excellent lampshade design,greatly improve the light utilization and evenness
- 5 Years warranty

## Parameter

<b>Type</b>	CH-TJK-150	<b>Input Voltage</b>	100-277V/50-60Hz
<b>Light Source</b>	CREE	<b>Dimming</b>	NO(Upon Request)
<b>Power</b>	150W	<b>Power Factor</b>	0.95
<b>Beam Angle</b>	120°	<b>THD</b>	<15%
<b>Luminous Flux</b>	More than 13500LM	<b>Connection</b>	3 Polors
<b>Lumen Efficacy</b>	Up to 90LM/W	<b>Warranty</b>	5 Years
<b>Color Temperature</b>	5000K(+/-400K)	<b>IP Rating</b>	IP67
<b>Operating Temp.</b>	-30-45°C	<b>Replace For</b>	300W(HID)
<b>CRI</b>	Ra75	<b>Certification</b>	UL.DLC.FCC.ROHS
<b>Driver</b>	MeanWell	<b>UL Number</b>	E472052

## Light Distribution Curve

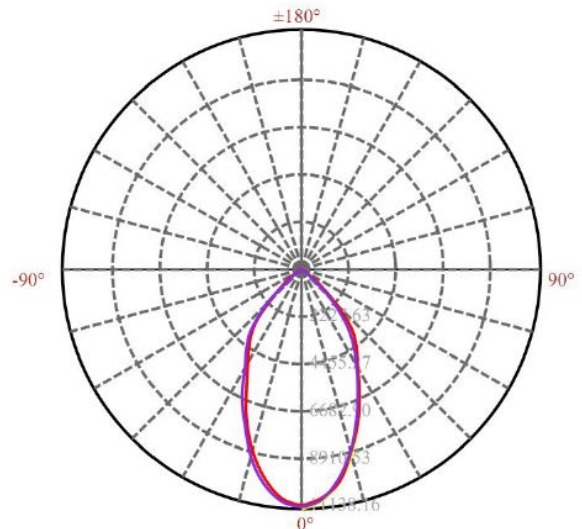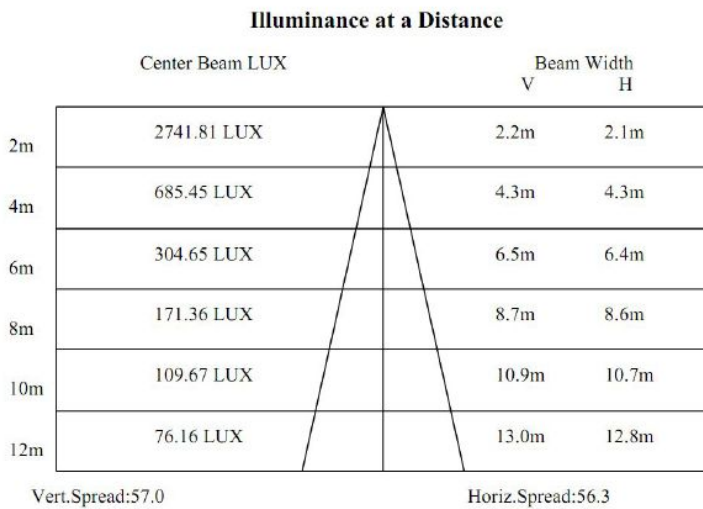


## Application

LED High bay Light series can be widely used in indoor or half outdoor lighting, like Indoor parking, mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station etc



## Temperature Compensation

# H-Tech LED High Bay Light

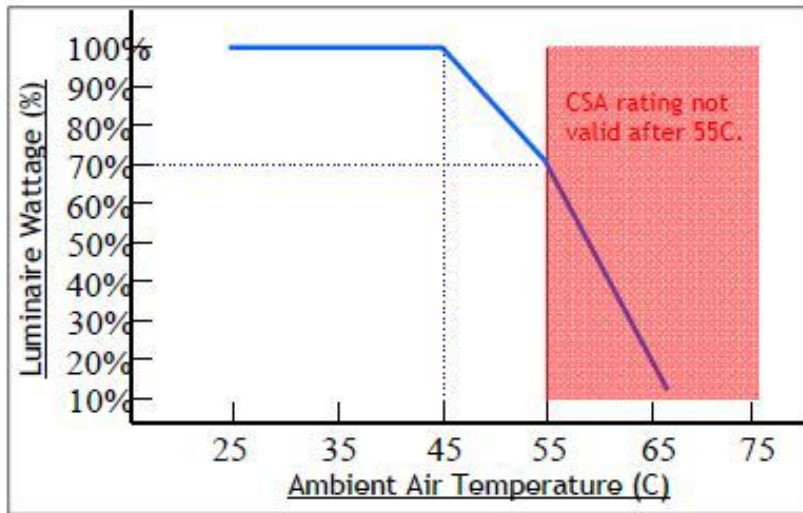


Control module activates at 45C. L70 output reached at 55C.

Continuous operation after 55C with increased compensation.

CSA certification valid to 55C only.

Chart accurate for Standard Output versions only.

## Size

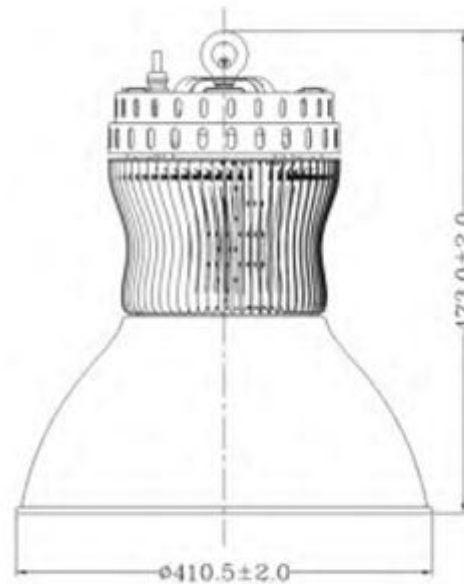


## Installation

# H-Tech LED High Bay Light


**Note**

1. Please turn off the power before installation
2. The product should be installed by professional electrician


STEP No.1: Install A to B with screw (Only divided package);

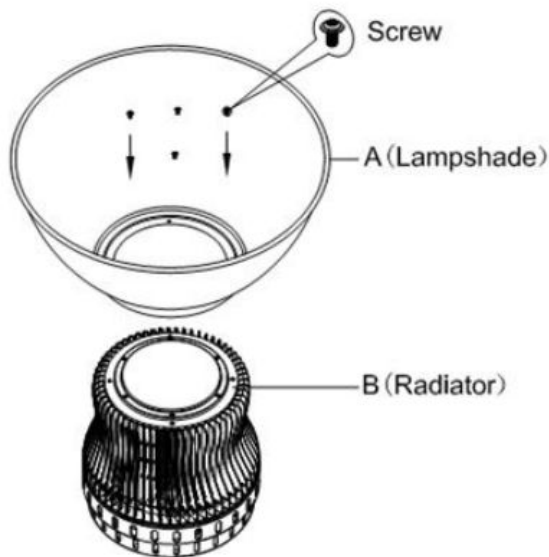

STEP No.2: Install C to the mounting surface :

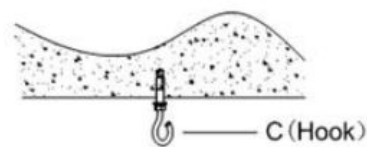



STEP No.3: Hang D to C ;

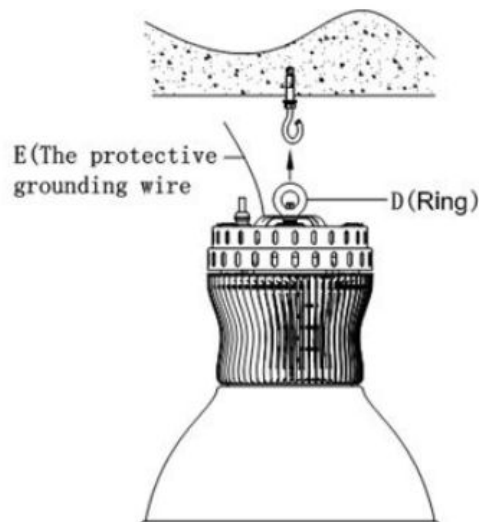

STEP No.4: Correct connection the power cable and E ;


## Packing details

Model	Meas	Qty	Net weight
CH-TJK-150	411*411*473mm	1pcs/carton	4.0kg

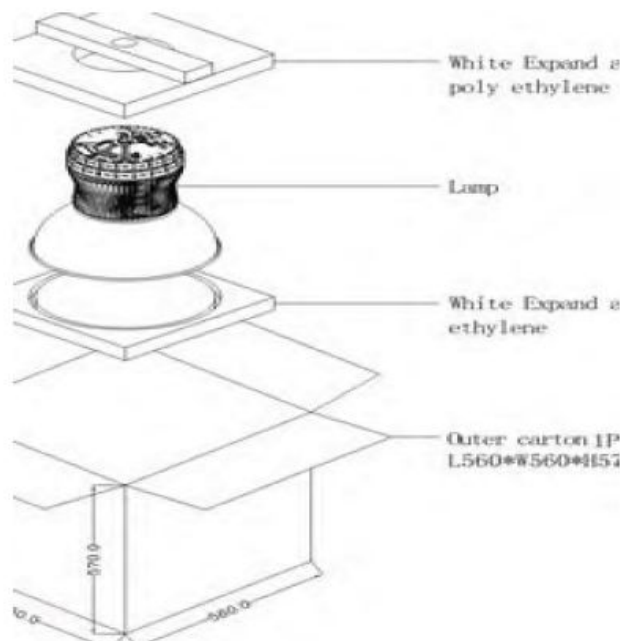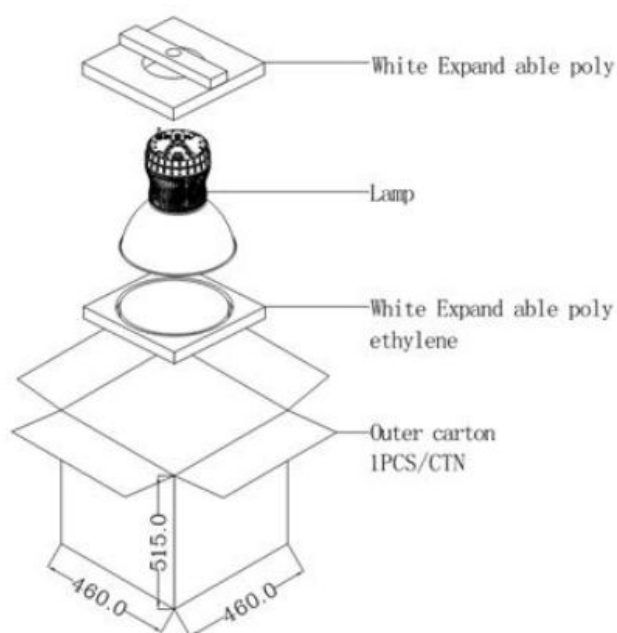





## Lampshade Options

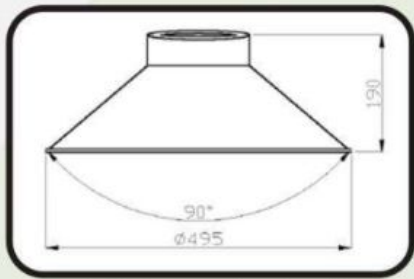


(AI Lampshade A)

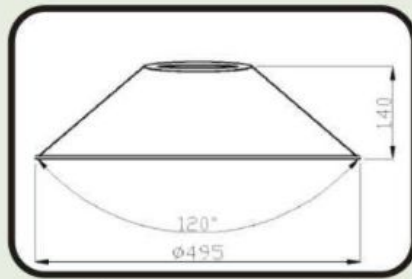


(AI Lampshade B)

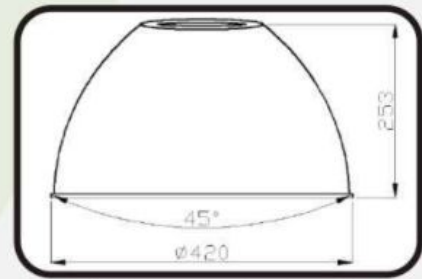


(AI Lampshade C)

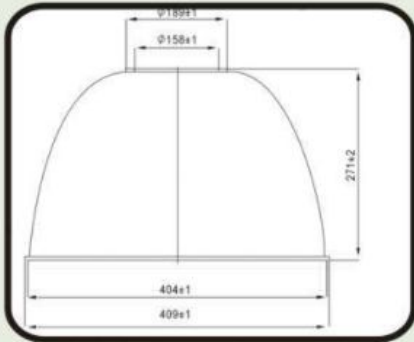

(PC Lampshade D)

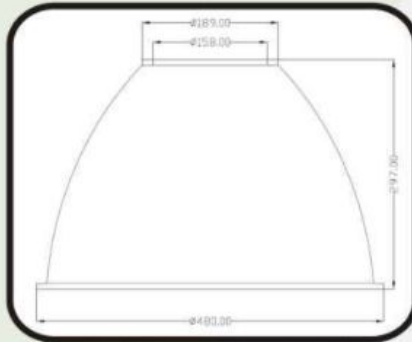

(PC Lampshade E)

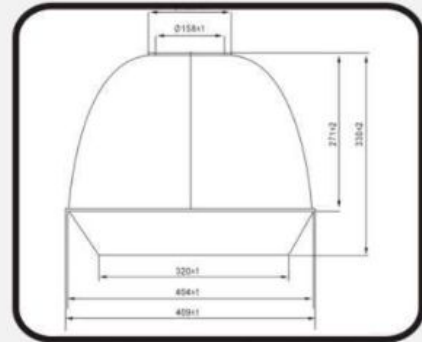

(PC Lampshade F)