

# H-Tech LED Flood Light



6 Led Module



- Excellent lamp shape design, greatly improve the light utilization and evenness, LED  $T_j < 85^{\circ}\text{C}$
- Heat Sink and Light Shell in Integration Design, Expanding Effective Thermal Management Area
- Philips Lumileds Source + MeanWell Driver, High Reliability

- Our Module products all have get many relevant certificates



## Parameter


Type	CH-FG-200W	Input Voltage	100-277V/50-60Hz
Light Source	PHILIPS Lumileds	Dimming	NO
Power	200W	Power Factor	0.95
Beam Angle	120°	THD	<15%
Luminous Flux	More than 21000LM	Connection	3 Polars
Lumen Efficacy	Up to 105LM/W	Warranty	5 Years
Color Temperature	5000K(+/-400K)	IP Rating	IP66
Operating Temp.	-30-45°C	Suggested Rep. For	480W(HID)
CRI	Ra70(Ra80Optional)	Certification	UL.DLC.FCC.ROHS
Driver	MeanWell	UL Number	E472052

Outdoor and Industry LED Lighting

E-mail: [info@cltlledsolutions.com](mailto:info@cltlledsolutions.com)

Web: [www.cltlledsolutions.com](http://www.cltlledsolutions.com)


## Light Distribution Curve(60/100/120Degree)

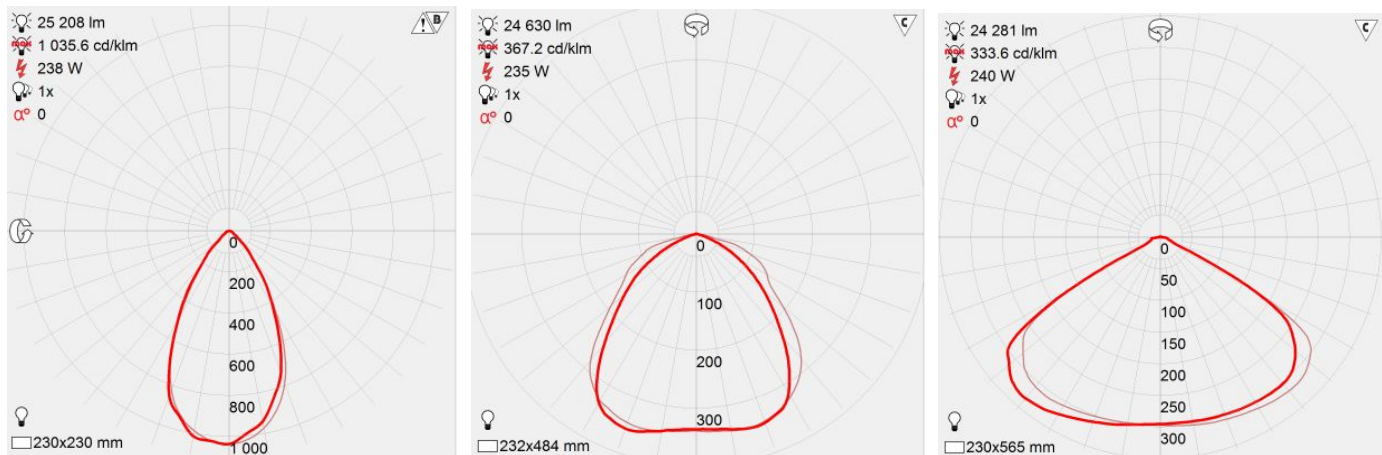

## Application

Widely used in Outdoor, Sport place 、 Stadium 、 Tunnel lighting、 Building lighting and some other top lighting. Can also be used as a high bay.

## Temperature Compensation

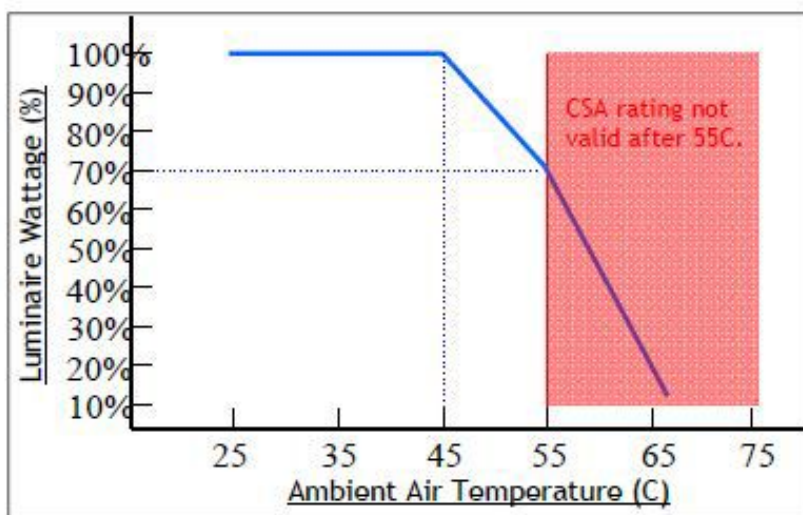

Control module activates at 45C. L70 output reached at 55C.

Continuous operation after 55C with increased compensation.


CSA certification valid to 55C only.

Chart accurate for Standard Output versions only.

# H-Tech LED Flood Light


**CLTL**  
—LED solutions—

## Size

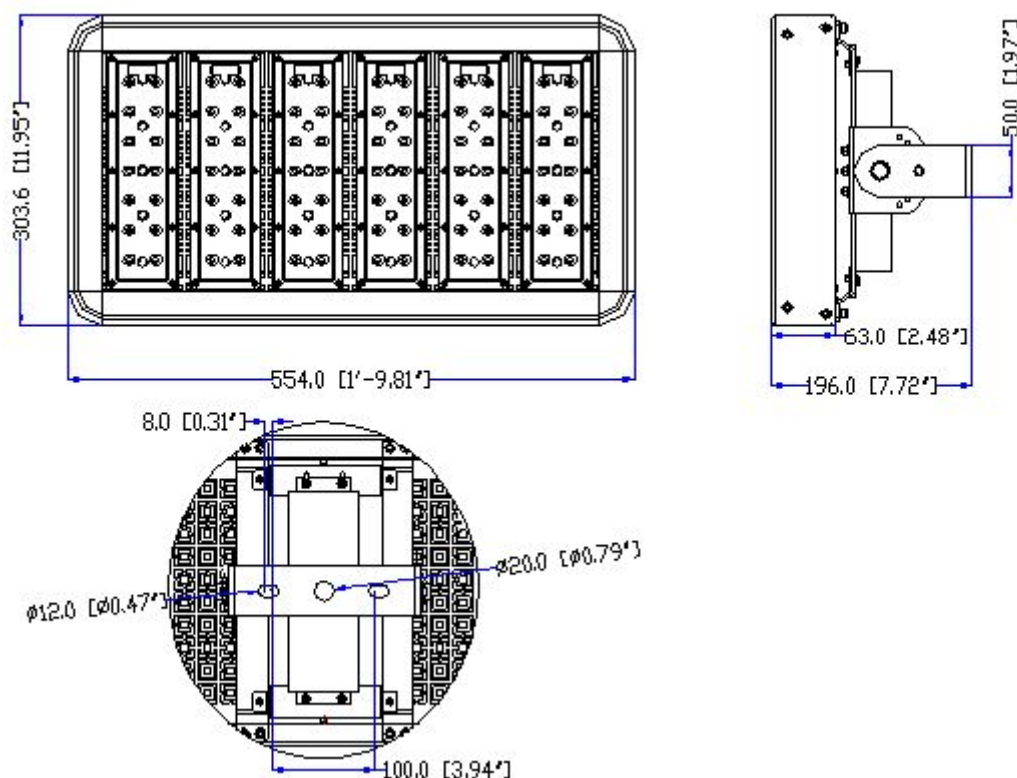

## Installation

The range exposure of the light can be adjusted optional .Connected with 3 core wire.

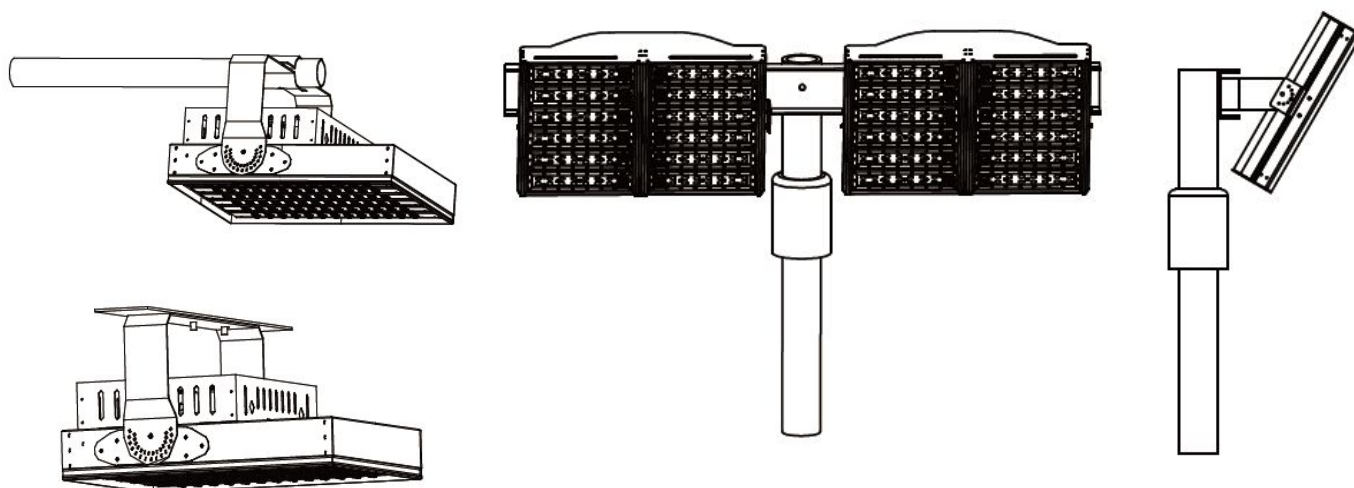

Outdoor and Industry LED Lighting

E-mail: [info@cltlledsolutions.com](mailto:info@cltlledsolutions.com)

Web: [www.cltlledsolutions.com](http://www.cltlledsolutions.com)

# H-Tech LED Flood Light



## Packing details

Model	Meas	Qty	Net weight
CH-FG-240W	375*625*255mm	1pcs/carton	13.5kg



**US Patents Pending. Specification subject to change without notice. See website for latest version.**

CLTL LED luminaires must be installed by a qualified electrician. It is the responsibility of the contractor, installer, purchaser, owner, and user to install, maintain, and operate the luminaire in such a manner as to comply with all state and local laws, ordinances, regulations, and the American National Standards Institute Safety Code.

## Outdoor and Industry LED Lighting

E-mail: [info@cltlledsolutions.com](mailto:info@cltlledsolutions.com)

Web: [www.cltlledsolutions.com](http://www.cltlledsolutions.com)